



SSOD003AH023000

MSA and TAA Combo PON OLT SFP+ Transceiver (SMF, 1577nmTx/1270nmRx and 1490nmTx/1310nmRx, D, SC, DOM)

Product Description

This MSA compliant Combo PON OLT class D SFP+ transceiver provides 1G/10GBase throughput up to 20km over single-mode fiber (SMF) using a wavelength of 1577nmTx/1270nmRx and 1490nmTx/1310nmRx via a SC connector. It can operate at temperatures between 0 and 70C. This transceiver is Trade Agreements Act (TAA) compliant. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

Features:

- SFF-8472 Compliant
- Single Fiber Bi-Directional Data Links Tx 9.953Gbps, Burst Mode Rx 9.953G/2.488Gbps Application
- ITU-T G.9807.1 and ITU-T G.987.2 Compliant
- SC UPC Receptacle Connector
- Single-Mode Fiber
- Single Fiber Bi-Directional Data Links Tx 2.488Gbps, Burst Mode Rx 1.244Gbps Application
- Commercial Temperature: 0 to 70 Celsius
- SD Indication
- RoHS Compliant and Lead-Free



Applications:

- XGS-PON Class D OLT
- GPON OLT Class D OLT

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.
Vcc3 Power Supply Voltage	Vcc3	3.13	3.47	V
Storage Ambient Temperature	Tstg	-40	85	°C
Operating Case Temperature	Tc	0	70	°C
Relative Storage Humidity	RHstg	5	85	%
Relative Operating Humidity	RHop	5	85	%


XGSPON/XGPON Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Total Power				3.3	W	
XGSPON Transmitter						
Data Input Differential Swing		100		850	mV	1
Input Differential Impedance	ZIN	90	100	110	Ω	
Tx_Disable	Disable	2		Vcc+0.3	V	
	Enable	0		0.8	V	
Tx_Fault	Fault	2.4		Vcc+0.3	V	
	Normal	0		0.4	V	
Eye Mask Definitions: (X3-X2, Y1, Y2, Y3, Y4)		(0.2, 0.25, 0.75, 0.25, 0.25)			UI	2
XGSPON/XGPON Receiver						
Guard Time	Tg	50	100		ns	
Reset Pulse Width	Tr	25.6			ns	
Receiver Threshold Settling Time	T _{SETTLING}			100	ns	3
Data Output Differential Swing		400		800	mV	4
Output Differential Impedance	ZOUT	90	100	110	Ω	
SD Assert Level Time				100	ns	
SD De-Assert Level Time				100	ns	
SD Voltage – Low		0		0.4	V	
SD Voltage – High		2.4		Vcc+0.3	V	


Notes:

1. CML input. AC coupled.

2. Test procedure for eye mask:

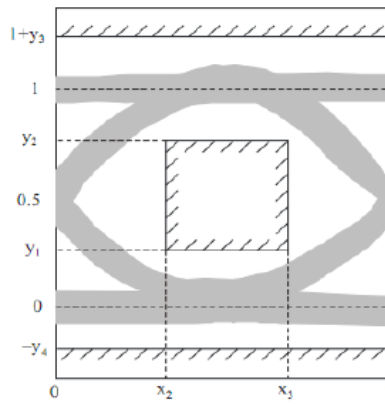

3. Timing parameter definitions in XGSPON burst mode sequence:

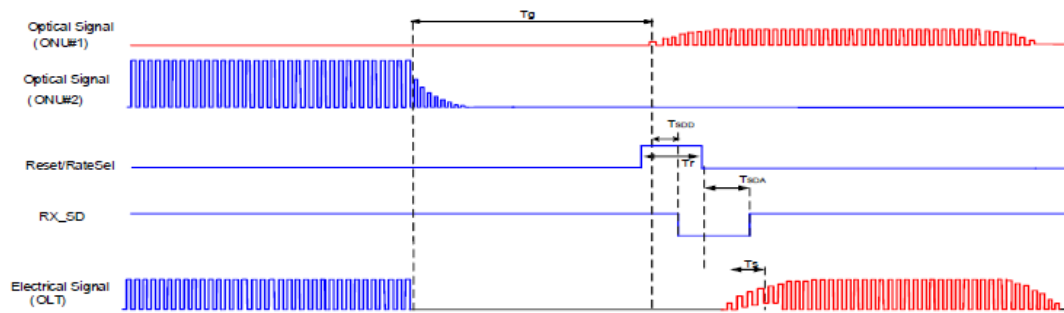


4. DC coupled. CML output.

GPON Electrical Characteristics


Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Total Power				3.3	W	
GPON Transmitter						
Data Input Differential Swing		100		850	mV	1
Input Differential Impedance	ZIN	90	100	110	Ω	
Tx_Disable	Disable	2		Vcc+0.3	V	
	Enable	0		0.8	V	
Tx_Fault	Fault	2.4		Vcc+0.3	V	
	Normal	0		0.4	V	
Eye Mask Definitions: (X3-X2, Y1, Y2)			(0.2, 0.25, 0.75)		UI	2
GPON Receiver						
Guard Time	Tg	25.6	50		ns	
Reset Pulse Width	Tr	12.8			ns	
Receiver Threshold Settling Time	T _{SETTLING}		25.6		ns	3
Data Output Differential Swing		600		1600	mV	4
Output Differential Impedance	ZOUT	90	100	110	Ω	
SD Assert Level Time	Ta			24	ns	3
SD De-Assert Level Time				25.6	ns	
SD Voltage – Low		0		0.4	V	
SD Voltage – High		2.4		Vcc+0.3	V	

Notes:

1. CML input. AC coupled.
2. Test procedure for eye mask:

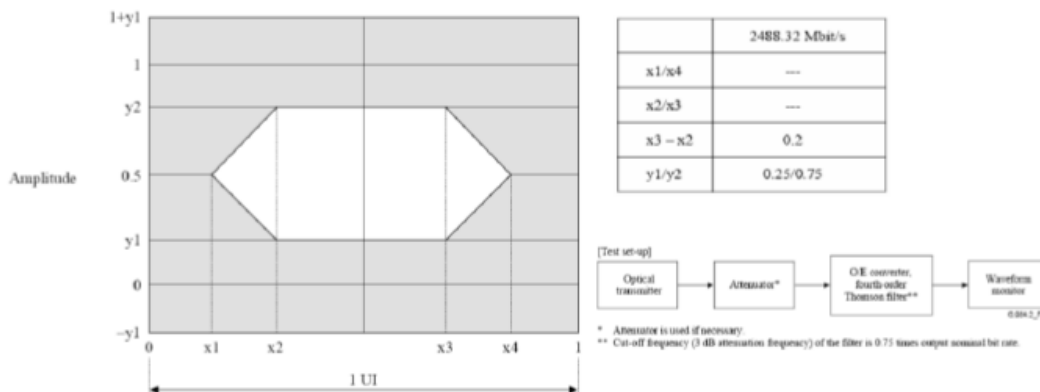

3. Timing parameter definitions in GPON burst mode sequence:

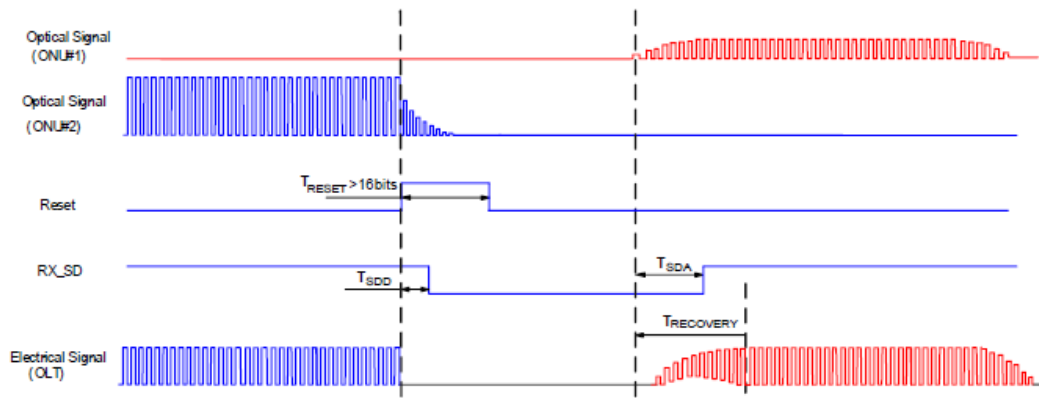

4. LVPECL output. DC coupled.


XGSPON/XGPON Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
XGSPON Transmitter						
Tx Data Rate			9.953		Gbps	
Optical Center Wavelength	λ_C	1575		1580	nm	
Optical Spectrum Width (-20dB)	$\Delta\lambda$			1	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Average Launch Optical Power	Pavg	+8		+11	dBm	1
Power-Off Transmitter Optical Power				-39	dBm	1
Extinction Ratio	ER	8.2			dB	2
Optical Waveform Diagram		Compliant with ITU-T G.9807.1				3
Tolerance to Transmitter Incident Light Power		-15			dB	
Transmitter and Dispersion Penalty	TDP			1	dB	4
XGSPON Receiver						
Rx Data Rate			9.953		Gbps	
Operating Wavelength	λ_C	1260		1280	nm	
Sensitivity	SEN			-32.0	dBm	5
Minimum Overload		-11			dBm	5
Maximum Optical Input				0	dBm	5
SD Assert Level				-32.5	dBm	
SD De-Assert Level		-43			dBm	
Hysteresis		0.5		6	dB	
Receiver Reflectance				-12	dB	
XGPON Receiver						
Rx Data Rate			2.488		Gbps	
Operating Wavelength	λ_C	1260		1280	nm	
Sensitivity	SEN			-33.5	dBm	6
Minimum Overload		-13			dBm	6
Maximum Optical Input				0	dBm	6
SD Assert Level				-34.0	dBm	
SD De-Assert Level		-43			dBm	
Hysteresis		0.5		6	dB	
Receiver Reflectance				-12	dB	

Notes:

1. Launched into SMF.
2. PRBS 2³¹ @9.953Gbps.

3. Mask margin is >5%. XGSPON transmitter eye mask definitions:

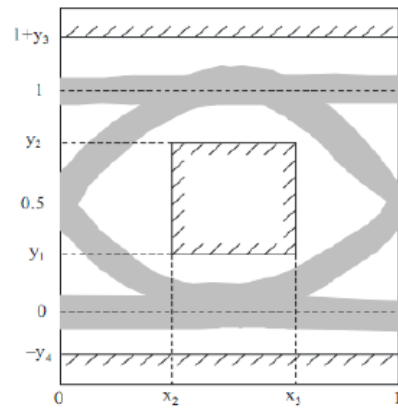


4. Transmit on 20KM SMF.
5. $ER \geq 6\text{dB}$, PRBS 2^{31} , @9.953Gbps, and $BER \leq 1 \times 10^{-3}$.
6. $ER \geq 6\text{dB}$, PRBS 2^{23} , @2.488Gbps, and $BER \leq 1 \times 10^{-4}$.

GPON Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
GPON Transmitter						
Tx Data Rate			2.488		Gbps	
Optical Center Wavelength	λ_C	1480		1500	nm	
Optical Spectrum Width (-20dB)	$\Delta\lambda$			1	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Average Launch Optical Power	P_{avg}	+6		+10	dBm	1
Power-Off Transmitter Optical Power				-39	dBm	1
Extinction Ratio	ER	8.2			dB	2
Optical Waveform Diagram		Compliant with ITU-T G.984.2				3
Tolerance to Transmitter Incident Light Power		-15			dB	
Transmitter and Dispersion Penalty	TDP			1	dB	4
GPON Receiver						
Rx Data Rate			1.244		Gbps	
Operating Wavelength	λ_C	1290	1310	1330	nm	
Sensitivity	SEN			-35.0	dBm	5
Minimum Overload		-15			dBm	5
Maximum Optical Input				0	dBm	5
SD Assert Level				-35.5	dBm	
SD De-Assert Level		-43			dBm	
Hysteresis		0.5		6	dB	
CID		72			bit	

Notes:

1. Launched into SMF.
2. PRBS 2^{23} @2.488Gbps.
3. Mask margin is >5%. GPON transmitter eye mask definitions:

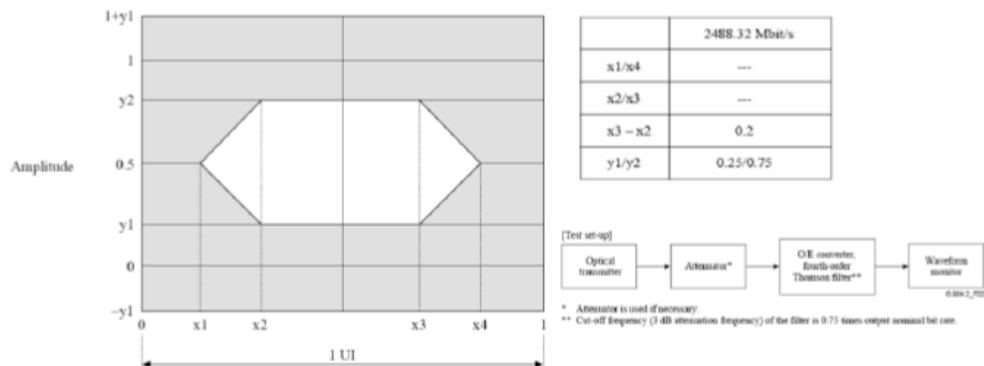

4. Transmit on 20KM SMF.
5. $ER \geq 10\text{dB}$, PRBS 2^{23} , @1.244Gbps, and $BER \leq 1 \times 10^{-4}$.

Pin Descriptions

Pin	Symbol	Name/Description	Notes
1	GPON_TD+	2.5G Transmit Data In.	1
2	GPON_TD-	Inverted 2.5G Transmit Data In.	1
3	GND	Module Ground.	
4	SDA	2-Wire Serial Interface Data.	2
5	SCL	2-Wire Serial Interface Clock.	3
6	GPON_RD-	Inverted Received 1G Data Out.	4
7	Reset & Rate Select	XGSPON Reset & Rate Select.	5
8	XGSPON SD	XGSPON SD Indicator.	6
9	Trig/Tx_Disable	Receiver RSSI Trigger Input/Transmitter Disable.	7
10	GPON_RD+	Received 1G Data Out.	4
11	GND	Module Ground.	
12	XGSPON_RD-	Inverted Received 10G Data Out.	8
13	XGSPON_RD+	Received 10G Data Out.	8
14	GPON SD	GPON SD Indicator.	
15	VccR	3.3V DC Power Input.	
16	VccT	3.3V DC Power Input.	
17	GPON RESET	GPON RESET.	
18	XGSPON_TD+	Differential 10G Transmit Data In.	1
19	XGSPON_TD-	Inverted Differential 10G Transmit Data In.	1
20	GND	Module Ground.	

Notes:


1. AC coupled. CML input.
2. The data line of the 2-wire serial interface.
3. The clock line of the 2-wire serial interface.
4. DC coupled. LVPECL output. This contact shall be pulled down with LVPECL output in the host.
5. High = Reset. Middle = 2.5G. Low = 10G. High voltage is greater than 1.9V. Intermediate voltage is 1.2V~1.6V. Low voltage is lower than 0.9V.
6. Low = Lost Signal.

7. The mode can be switched. A2 RSSI/TXDIS Selection:

Address	Bit	Name	Description
A2 BYTE118	7	RSSI Select	Writing "0" for XGS-PON RSSI Monitor; Writing "1" for GPON RSSI Monitor. Default power up value is "0".
	6	RSSI/ TXDIS Select	When set "0", PIN9 input as TXDIS input; When set "1", PIN9 as RSSI input. Default power up value is "0".
	5	XGSPON TXDIS Selection	When set "0", PIN9 as the XGS-PON TXDIS input. Default power-up value: "0". [4]
	4	GPON TXDIS Selection	When set "0", PIN9 as the GPON TXDIS input. Default power-up value: "0". [4]

8. DC coupled. CML output. While XGS SD is low level, the squelch function makes XGS LA output muting.

Electrical Pin-Out Details

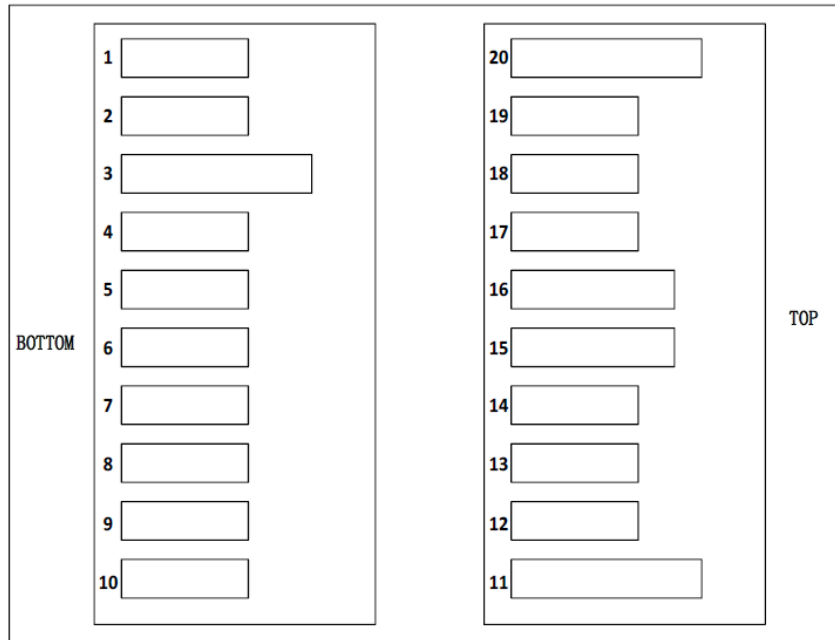

XGS Digital Diagnostic Monitoring Interface

Parameter	Range	Accuracy	Calibration	Page	Address	Notes
Temperature	0°C to 70°C	±3°C	Internal	A2	Byte 96~97, Byte96 is MSB	1
Voltage	2.97V to 3.63V	±5%	Internal	A2	Byte 98~99, Byte98 is MSB	2
Bias Current - XGS	0mA to 262mA	±10%	Internal	A2	Byte 100~101, Byte100 is MSB	3
Tx Power - XGS	8dBm to 11dBm	±2dB	Internal	A2	Byte 102~103, Byte102 is MSB	4
XGSPON Rx Power Monitor	-34dBm to -11dBm	±3dB	Internal	A2	Byte 104~105, Byte104 is MSB	5

Notes:

1. LSB: 1/256C.
2. LSB: 0.1mV.
3. LSB: 4uA.
4. LSB: 0.4uW.
5. LSB: 0.1uW.


GPON Digital Diagnostic Monitoring Interface

Parameter	Range	Accuracy	Calibration	Page	Address	Notes
Temperature	-40°C to 85°C	±3°C	Internal	B2	Byte 96~97, Byte96 is MSB	1
Voltage	2.97V to 3.63V	±5%	Internal	B2	Byte 98~99, Byte98 is MSB	2
Bias Current - GPON	0mA to 262mA	±10%	Internal	B2	Byte 100~101, Byte100 is MSB	3
Tx Power - GPON	6dBm to 10dBm	±2dB	Internal	B2	Byte 102~103, Byte102 is MSB	4
GPON Rx Power Monitor	-35dBm to -15dBm	±3dB	Internal	B2	Byte 104~105, Byte104 is MSB	5

Notes:

1. LSB: 1/256C.
2. LSB: 0.1mV.
3. LSB: 4uA.
4. LSB: 0.4uW.
5. LSB: 0.1uW.


EEPROM

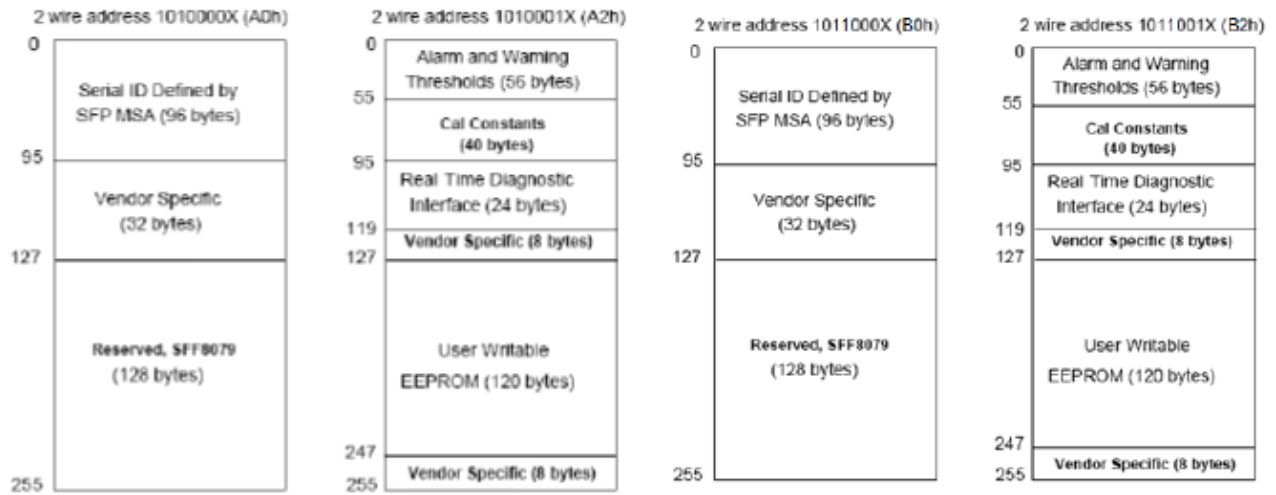

Notes:

- EEPROM memory map-specific data field descriptions.
- A0h(1010000X) and B0h(1011000X) are the Serial ID addresses for XGSPON/XGPON and GPON OLT, respectively.
- A2h(1010001X) and B2h(1011001X) are the Digital Diagnostic addresses for XGSPON/XGPON and GPON OLT, respectively.

Mechanical Specifications

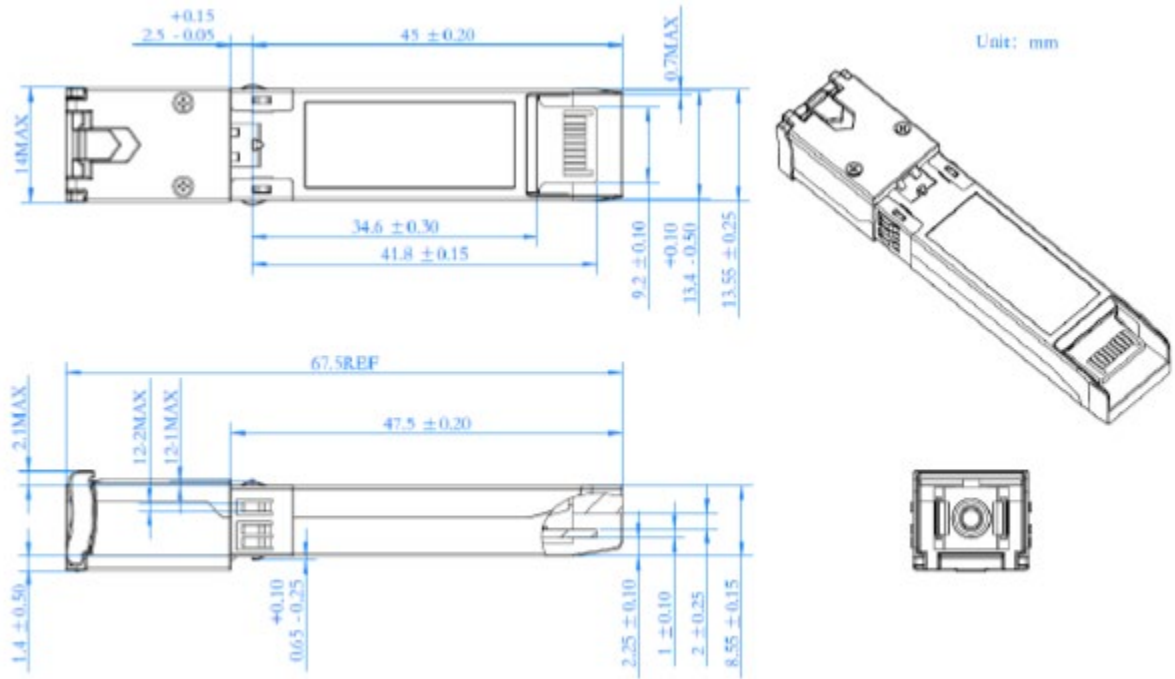

About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box (SKYGATE).

